
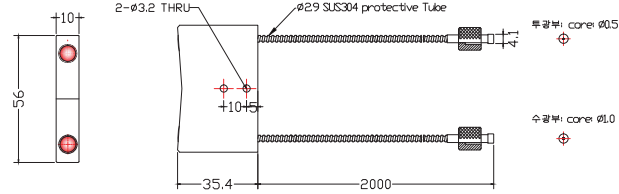


GPF-VD50-LF250-2.0AC(★)

진공용 화이버 유니트 : 초장거리 한정반사형


곡률반경	사용온도	사각블럭	렌즈직경	케이블 종류, 굵기	프리컷	검출거리
R25	-30°C ~ +70°C	56×35.4×10	ø8.0	ø2.9 Optical fiber	불가능	300mm 거리에서 SPOT경 ø20 150~400mm






GPF-VD50-LF250-TS(★)

곡률반경	사용온도	사각블럭	렌즈직경	케이블 종류, 굵기	프리컷	검출거리
R25	-60°C ~ +200°C (max250°C)	68×30×10	ø8.0	ø2.9 SUS TUBE	불가능	70~210 mm



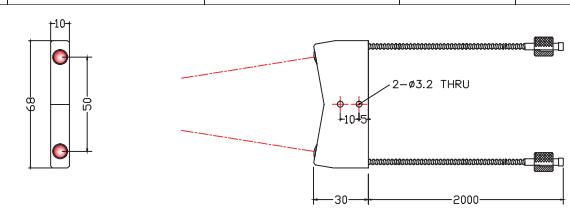

GPF-VD51-LF250-TS(★)

곡률반경	사용온도	사각블럭	렌즈직경	케이블 종류, 굵기	프리컷	검출거리
R25	-60°C ~ +200°C (max250°C)	35×30×10	ø8.0	ø2.9 SUS TUBE	불가능	30~160 mm

