
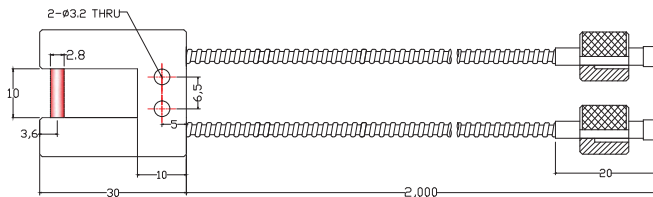


GPF-VS10-250-2.0

곡률반경	사용온도	헤드	코어구성	케이블 종류, 굵기	프리켓	검출거리
R25	-60°C ~ +200°C (max250°C)	26 × 30 × 6	∅2.8(렌즈직경)	∅2.9 Optical fiber	불가능	10mm



GPF-VS20-250-2.0

곡률반경	사용온도	헤드	코어구성	케이블 종류, 굵기	프리켓	검출거리
R25	-60°C ~ +200°C (max250°C)	26 × 36 × 6	∅2.8(렌즈직경)	∅2.9 Optical fiber	불가능	20mm

